

## GP17500E

**GP SERIES**  
Commercial/Residential  
Portable Generators

Model 5735-2 UPC: 696471057355  
(EPA/49-State)


### Features

- The **Generac OHVI® engine** incorporates full pressure lubrication with automotive style spin on oil filter for longer life engine.
- **Low-oil pressure shutdown** automatically safeguards engine from damage.
- **Large-capacity fuel tank** with incorporated fuel gauge provides durability and extended run times.
- **Hardened 1 1/4" steel tube cradle** for added strength and durability.
- **Hour Meter** tracks maintenance intervals.
- **Heavy-duty, pneumatic wheels** for reliable portability.
- **Electric Start**, battery included, provides hassle-free start-up.
- **Idle control** reduces noise and conserves fuel for extended run-times.
- **Integrated lifting eye** for easy transport and security on the job site.



**AC Rated Output Running Watts 17500**  
**AC Maximum Output Starting Watts 26250**

### 49-State Control Panel

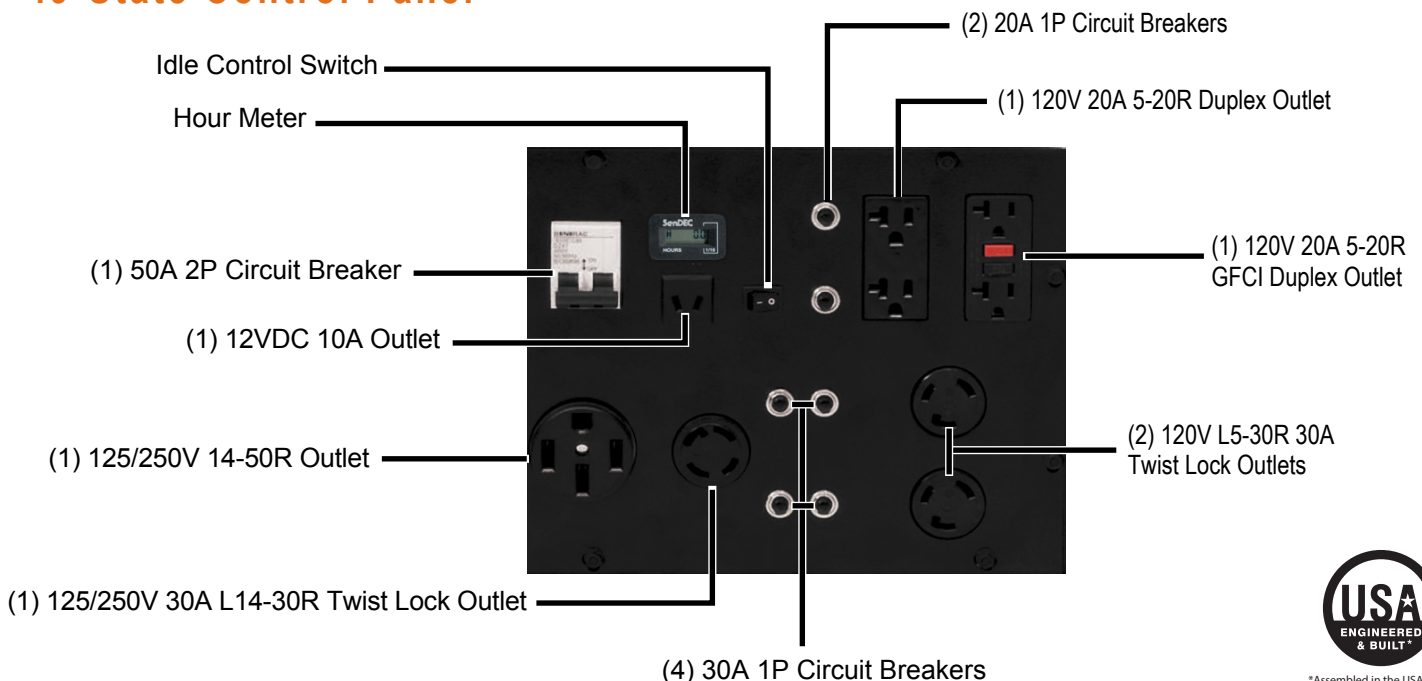

\*Assembled in the USA using domestic and foreign parts

## GP17500E

### Specifications

|  |   |
|--|---|
| Product Series                         | GP17500E  |
| Model (Configuration)                  | 5735-2 (EPA/49-State)                                       |
| AC Rated Output Running Watts          | 17500   |
| AC Maximum Output Motor Starting Watts | 26250   |
| Rated AC Voltage                       | 120/240 VAC   |
| Rated AC Frequency                     | 60 Hz   |
| Rated VAC Amperage                     | 145.8 /72.9   |
| Engine Displacement                    | 992cc   |
| Engine Type                            | OHVI  |
| Engine RPM                             | 3600  |
| Recommended Oil                        | 10W-30 / SAE30  |
| Oil Capacity qt (L)                    | w/ Filter Change: 1.7 (1.6)<br>w/o Filter Change: 1.4 (1.3) |
| Lubrication Method                     | Oil Pump  |
| Automatic Voltage Regulation (AVR)     | Yes   |
| Choke Location                         | On Engine   |
| Fuel Shut Off                          | On Fuel Tank  |
| Starting Method                        | Electric  |
| Low Oil Shutdown Method                | Low Pressure  |

|                               |   |
|-------------------------------|---|
| Battery Included              | Yes   |
| Battery Type                  | Group U1  |
| Battery Part No.              | N/A (Replacement batteries must be purchased locally) |
| Battery Dimensions            | Group U1 has a standard case size                     |
| Battery Charger Input Jack    | Included  |
| Neutral Bonded to Ground      | Yes - Neutral Bonded to Frame                         |
| Start Switch Type             | Off/Run/Start Switch                                  |
| Switch Location               | On Engine   |
| Fuel Gauge                    | Built-In Tank   |
| Fuel Tank Capacity Gal (Ltrs) | 16 (60.6)   |
| Run Time at 50% (Hours)       | 10  |
| Handle Style                  | Fixed   |
| Wheel Type                    | 12.3 Pneumatic Wheels                                 |
| Maintenance Kit               | Included  |
| Warranty- Residential         | 2 Year Limited  |
| Warranty- Commercial          | 1 Year Limited  |

### Dimensions and Weights

|                          |              |
|--------------------------|--------------|
| Length in (mm)           | 48.5 (1232)  |
| Width in (mm)            | 31 (787)     |
| Height in (mm)           | 39.5 (1003)  |
| Carton Length in (mm)    | 50 (1267)    |
| Carton Width in (mm)     | 23 (584)     |
| Carton Height in (mm)    | 44.25 (1125) |
| Unit Weight lbs (kg)     | 390 (177)    |
| Shipping Weight lbs (kg) | 513 (233)    |

