


**FT-14 IT-I**
**DD IT-I Series**
**GVWR LBS:**
**16,100**
**GAWR LBS:**
**14,000**
**WEIGHT LBS:**
**3,800**
**CAPACITY LBS:**
**12,300**

- 8x15# I-beam Main Frame
- 3" (80K) Jr I-beam crossmembers
- 17" Avg on center

- (2) Cushion Cylinders
- Deck Length = Tilt Angle
- 14' = 17 Degrees 16' = 14 Degrees
- 18' = 13 Degrees 20' = 12 Degree

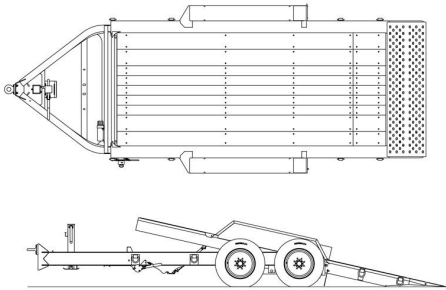

Standard & Other Options	Description	Std. Option	Std. Qty.	Unit
Deck Length	Tilt Deck Length	X	16.00	Feet
Deck Type	White Oak 2" Nom	X	1.00	Std
Appx Deck Height	21.5" Loaded, 23.5" Unloaded	X	1.00	Inches
Width	102" OD, 83.5" ID	X	1.00	Inches
Tie Downs	D-Rings, 5/8 Straight	X	8.00	Std
Brakes	Electric, Dexter FSA (Fwd Self Adj) On All Axles	X	1.00	Std
Axles	7K Heavy Duty Dexter, Drop	X	2.00	Std
Axles, Acc	Dexter EZ-Lube Hubs	X	1.00	Std
Suspension	Dexter Spring, 36" Spread	X	1.00	Std
Tires & Wheels	215/75R 17.5 H, 8 Bolt [17.5 x 6.75] Plate Wheel	X	4.00	Each
Hitch Length	Center of Coupler to Headboard, Appx - Adj Hitch Range 14.5" to 23.5" (20.5" to 25" if Hyd)	X	5.00	Feet
Hitch Type	2.5" Adjustable Lunette Eye/Pintle, [C] 42,000 lb Plate Mount (5/8" Bolt),	X	1.00	Std
Jack	12K Drop Leg ** Side Wind **	X	1.00	Std
Plug	7 Pole RV	X	1.00	Std
Lights	LED,4 tail light system, Sealed Wiring Harness (Tail lights located on rear of fenders)	X	1.00	Std
Trailer Color	Felling Black # CCA945378 (White Felling Decal)	X	1.00	Std
Standard	3/8" Safety Chains, Grade 70	X	1.00	Std
Standard	Document Holder	X	1.00	Std
Standard	Dual Cushion Cylinders	X	2.00	Std
GVWR	16,100 lbs	X	1.00	Std