

# DYNAPAC



Part of the Atlas Copco Group

## CC900G

### Double drum vibratory rollers



#### Technical data

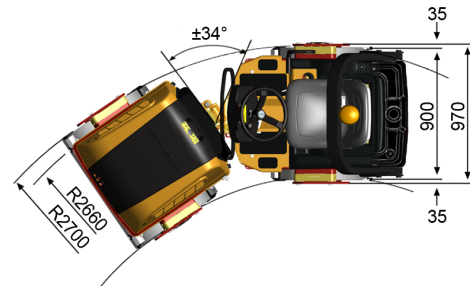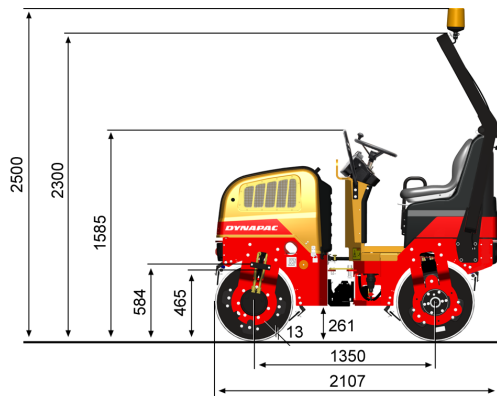

Masses	CC900G
Max. operating mass	3,300 lbs
Operating mass (incl. ROPS)	2,900 lbs
Module mass (front/rear)	1,300/1,600 lbs
Propulsion	
Speed range	0-8
Vertical oscillation	±13°
Theor. gradeability	35 %
Compaction	
Centrifugal force	3,800 lb
Nominal amplitude	0.016 in
Static linear load (front/rear)	37/46 lbs/in
Vibration frequency	4,200 vpm
Water tank (gal)	190
Engine	
Manufacturer/Model	Honda GX620k1QYD
Type	4-stroke gasoline
Rated power, SAE J1995	18 hp @ 3,000 rpm
Fuel tank capacity	6 gal
Hydraulic system	
Driving	Axial piston pump with variable displacement. 2 radial piston motors with constant displacement.
Vibration	Gear pump/motors with constant displacement.
Steering	Gear pump with constant displacement.
Service brake	Hydrostatic in forward and reverse lever.
Parking/ Emergency brake	Failsafe brake in both drums.
Standard equipment	
Standard equipment	Emergency stop, Horn, Hour meter, Ignition key, Propulsion in both drums, Foldable ROPS (incl. seat belt), Seat safety switch, Sliding operator seat, Towing eyelet (front/rear), Vibration on front drum, Warninglight for brakes, Warning light for hydraulic oil temp

#### Dynapac USA

3700 East 68th Avenue, Commerce City, CO 80022 Phone: 800-732-6762 Fax: 303-288-8828

Find your local dealer at [www.dynapac.us](http://www.dynapac.us)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.  
The above information is a general description only, all informations are supplied without liability.